


Technical information

For Liniar EnergyPlus90 windows



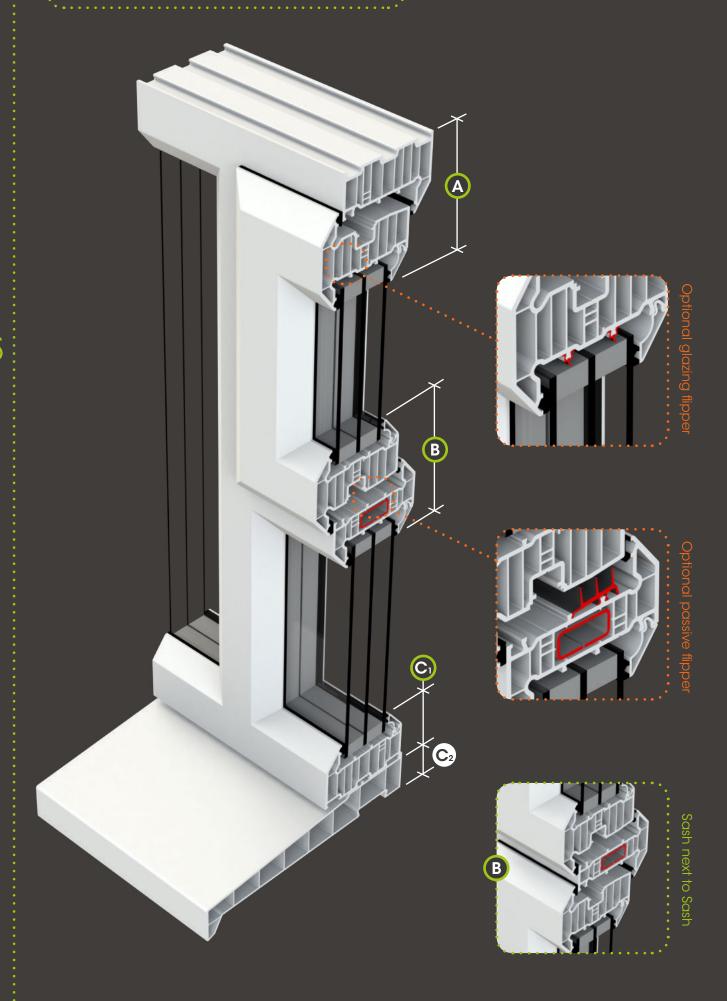

EnergyPlus 90 Casement Window

- WER as high as A++40
- 48mm and 56mm triple glazing options
- Passive House compliant with laminate glazing
- U-values as low as 0.5w/m²K (QGU)
- Acoustic values as high as Rw (C;Ctr) = 42 (-2;-6)

Accreditations










ISO 9001




Colour Options





























Additional colours are available to order as specials. The colours shown in this brochure give an indication only.



Product	Dim. A
Small frame & sash LCW9012 & LCW9033	103mm

Product	Dim. B
Transom & sash LCW9022 & LCW9033	116mm
Transom & 2 x sash LCW9022 & 2 x LCW9033	161mm

Product	Dim. 🕞
Small frame LCW9012	58mm

Product	Dim. 🕝
150, 165, 180 cills LSL150, LCL165, LSL180	30mm

Liniar specification guide

The Liniar Specification Guide is an A4-size, 234-page, full colour guide to specifying energy efficient PVCu windows and doors.

Covering the full range of lead-free Liniar products including EnergyPlus90 casement windows, the Specification Guide includes full product charts, U-values, dimensions, accreditations, safety information and a variety of case studies.

To view an online copy of the Liniar Specification Guide and to order your free copy visit :

www.liniar.co.uk/specification-guide

Flamstead House Denby Hall Business Park Denby Derbyshire DE5 8JX Tel: +44 (0)1332 883900 Fax: +44 (0)1332 883901 Email: sales@liniar.co.uk

